



Key Specifications



P/N	Parameter	Voltage	HP	Frequency	RPM	IP Rating	Insulation Class
YSLB-50-4-B001		208~230V	1/15HP	50/60Hz	1400/1550	IP24/IP20	Class B ( UL )
YSLB-50-4-B002		208~230V	1/15HP	50/60Hz	1400/1550	IP24/IP20	Class B ( UL )
YSLB-50-4-B003		208-230V	1/15HP	50/60Hz	1400/1650	IP24	Class B ( UL )
YSLB-50-4-B004		115/120V	1/15HP	50/60Hz	1300/1600	IP24	Class B ( UL )
YSLB-50-4-B005		115V	1/15HP	50/60Hz	1300/1550	IP24	Class B ( UL )
YSLB-50-4-B006		208-230V	1/15HP	50/60Hz	1300/1550	IP24	Class B ( UL )
YSLB-50-4-B007		208-230/220	1/15HP	60/50Hz	1400/1650	IP20	Class B ( UL )

Product Introduction

Single-phase asynchronous motors feature shell structures, capacitor operation, and are widely used in indoor/outdoor units of HVACR equipment.



Configuration & Assembly Dimensions

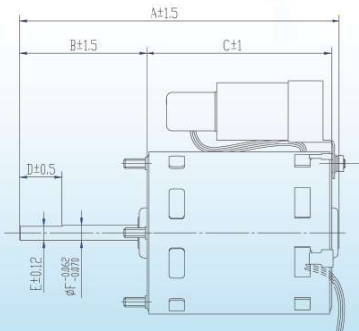

P/N	Dimensions	A	B	C	D	E	F	G	H
YSLB-50-4-B001		164.8	65.3	95	22.1	7.26	8	72	84
YSLB-50-4-B002		175.5	76	95	22.1	7.26	8	72	84
YSLB-50-4-B003		87	65.5	33.8	7	8	12.5	84	72
YSLB-50-4-B004		87	65.5	33.8	7	8	12.5	84	72
YSLB-50-4-B005		137.2	95	30.5	8	7	12.5	84	72
YSLB-50-4-B006		137.2	95	30.5	8	7	12.5	84	72
YSLB-50-4-B007		136.9	41.4	91	33.8	7.26	8	84	72

Remarks: All dimensions are measured in mm.